



高新技术企业/专精特新企业
专业的高温加热制造工厂 (-100~2600°C)



中国热处理行业协会理事单位
ISO45001:职业健康管理体系认证
ISO14001:环境管理体系认证
ISO9001:质量管理体系认证
欧盟CE产品认证



咨询电话



400-668-1868
+86 379-69936789

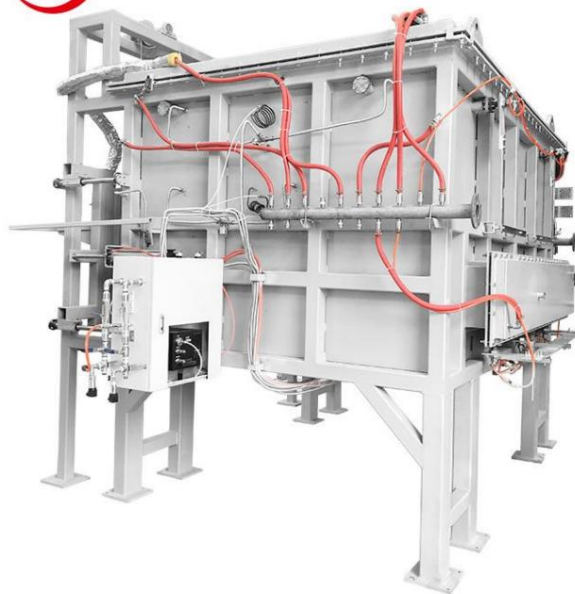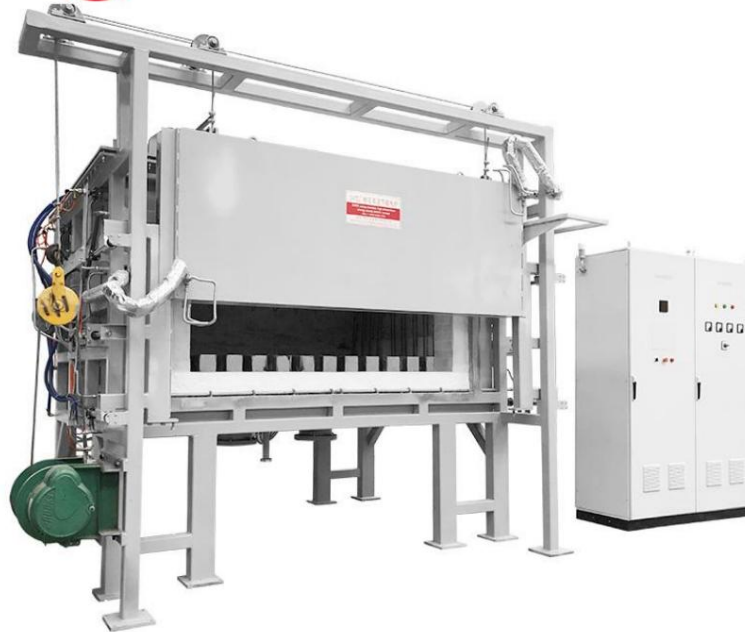

Main website: www.gwdl.com Email: wgq@gwdl.com Contact number: 0379-69936789 Address : No. 1,
Xingye 1st Road, Science and Technology Industrial Park, Jianxi District ,
Luoyang City , Henan Province



高新技术企业/专精特新企业
专业的高温加热制造工厂 (-100~2600℃)

中国热处理行业协会理事单位
ISO45001:职业健康管理体系认证
ISO14001:环境管理体系认证
ISO9001:质量管理体系认证
欧盟CE产品认证



咨询电话
400-668-1868
+86 379-69936789

Luoyang Juxing Kiln Co., Ltd.

1600°C Hydrogen Electric Furnace Configuration Details

sequence Number	item Head	name	Specifications and Models
1	furnace body	Second floor outside shell	6# steel plate + processing + lifting and positioning + locking + top water-cooled sealing
2		Machinery Department point	Track, furnace body connection, guide
3. Auxiliary components 4. Control		++	
cabinet (old/new)		kP cabinet, IP54 protection rating	
5	electrical	use	Reusing old parts of old furnaces (outer shell modification, electrical control modification; furnace chamber reinstallation, water-cooled electrodes and cable wiring adjustment) Copper and aluminum busbars, terminal blocks, etc.
6		Temperature controller surface	Yu Dian 2 sets, top + bottom
7		Overheating report police	Two sets of over-temperature alarms
8		Temperature Flow Signal conversion	Automatic temperature conversion Siemens chip
9 Transformer		Electrical	3 transformers, each 90kW, totaling 270kW
10		Installations Item	copper and aluminum power distribution plates, copper terminals
11 thermocouples			Tungsten-rhenium thermocouple
12		Pu Changdao Wire	Chongqing Dazheng
13 Voltmeter 14 Ammeter 15			Digital display OEM by Anton
Current Transformer Cable 17			Digital display OEM by Anton
Quick-Fuse AC Connector		0.5s Chint	
16		Overview of Luoyang (cabinet connections), based on actual usage during on-site installation.	
		300A Mingrong	
18	Contact	Chint 300A	
19	SCR	450A power regulator	
20	PLC	Siemens S7-200	



高新技术企业/专精特新企业
专业的高温加热制造工厂 (-100~2600℃)

中国热处理行业协会理事单位
ISO45001:职业健康管理体系认证
ISO14001:环境管理体系认证
ISO9001:质量管理体系认证
欧盟CE产品认证



咨询电话
400-668-1868
+86 379-69936789

21	Touchscreen	Software	10-inch									
		Programming	artificial									
		Procedure										
23	Radiator	Axial Airflow	ventilation window									
			D150									
		machine										
25	Differential	Pressure	Star Instrument									
		Gauge Inlet Valve										
26		Gates and Flows	D22, includes two flow meters, solenoid valves, etc.									
		Meters										
27	Oxygen content at the		Solenoid valve + ignition device									
28		exhaust port	Shanghai Yingsheng									
		sensor										
29	pieces of	phenolic	Denso									
30		resin board	Tungsten rod/Molybdenum rod									
		thermal element										
31		lower part	Tungsten rod/Molybdenum rod									
		thermal element										
32	bar tooling		Heating element wiring accessories									
33		accessories	Cabinet interiors, cable trays, cable ducts, and other auxiliary materials, etc.									
34			name	Length-width-thickness ratio				number	damage	weight		
		say						quantity	Consumption			
35		two	1.9	0.7	0.23	1700	2	1.2			1248.07	
		side										
36		end	1.9	1.5	0.23	1700	1	1.2			1337.22	
		department										
37		Alumina	back	1.72	0.7	0.23	1700	1	1.2		564.917	
		Refractory bricks	wall									
		Lightweight										
38		Standard brick pure	furnace	1.9	1.72	0.23	1700	1	1.2		1533.35	
		Spend	top									
39		99.47%	furnace	1.7	1	0.114	1700	1	1.2		395.352	
			Door									
40			furnace	1.7	1	0.23	1700	0.4	1.2		319.056	
			mouth									
41			Great	0.114	0.114	0.065	1700	42	1.2		72.3773	
		sluice										
42	high 1800	fiber	1800°C Ceramic Fiberboard (KG)									



高新技术企业/专精特新企业
专业的高温加热制造工厂 (-100~2600℃)

中国热处理行业协会理事单位
ISO45001:职业健康管理体系认证
ISO14001:环境管理体系认证
ISO9001:质量管理体系认证
欧盟CE产品认证



咨询电话 24h
400-668-1868
+86 379-69936789

43	temperature	Vynylon	name	Length-width-thickness ratio				number	damage	weight
	Festival		say					quantity	Consumption	
44	able		two	1.9	0.7	0.1	450	2 1.2		143.64
45	furnace		side							
	chamber		end	1.9	1.5	0.1	450	1 1.2		153.9
			department							
46			back	1.72	0.7	0.1	450	1 1.2		65.016
			wall							
47		furnace	1.9	1.72	0.1	450	1 1.2		176.472	
		top								
48		furnace	1.7	1	0.1	450	1 1.2		91.8	
		Door								
49		furnace	1.2	0.23	0.2	450	1 1.2		29.808	
		mouth								
50		Three layers of oxygen Aluminum fiber Viagra	It weighs 0.8 times that of the inner layer.							
51		Alumina thermal insulation cotton	1350 KDFIBER							
52		Alumina blanket	1550 KDFIBER							
53		Furnace door rise Downgrade	1							
54	Lift drop	Lifting control system	set							
55	Tie Unification	Motor + Gearbox + Frequency Converter + Machinery, etc.								
56	thing material Enter out Tie Unification									