



高新技术企业/专精特新企业
专业的高温加热制造工厂 (-100~2600°C)


中国热处理行业协会理事单位
ISO45001:职业健康管理体系建设认证
ISO14001:环境管理体系认证
ISO9001:质量管理体系认证
欧盟CE产品认证



咨询电话
13271526781
+86 379-69936789



Double-layer CVD sliding horizontal tube electric furnace

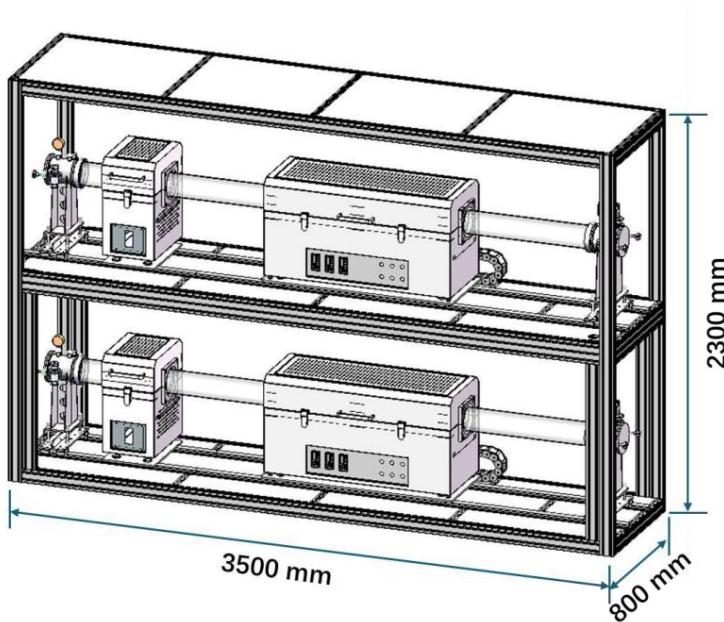



高新技术企业/专精特新企业
专业的高温加热制造工厂 (-100~2600°C)

中国热处理行业协会理事单位
ISO45001:职业健康管理认证
ISO14001:环境管理体系认证
ISO9001:质量管理体系认证
欧盟CE产品认证



咨询电话 13271526781
+86 379-69936789



Number	name	Specifications	Material quantity	Remark
1	130 furnace Components	3 Temperature Zone / Maximum Temperature 1100°C Each temperature zone is 300mm long / Do not partition	Two sets of aluminum silicate sheets are compatible with an outer diameter of 130mm.	Quartz tube Add a 30mm diameter furnace plugs at both ends of the bore
3	130 Preheating Furnace assembly	1. Temperature zone/ preheating furnace temperature zone length Spend 100mm, temperature 300-400°C	Two sets of aluminum silicate sheets are compatible with an outer diameter of 130mm.	Quartz tube Add a 30mm diameter furnace plugs at both ends of the bore
3	130 Furnace Shell Components	Compatible with 130mm outer diameter quartz tube Q235	2 sets of sheet metal processing	Powder coated 9016 Traffic White
4	130 Preheating Furnace shell assembly	Compatible with 130mm outer diameter quartz tube Q235	2 sets of sheet metal processing	Powder coated 9016 Traffic White
5	quartz tubes 130 water-	Ø130mm outer	Two quartz crystals, estimated length 3000mm	
6	cooled Flange assembly	diameter, compatible with 130mm outer diameter SUS 304 quartz tubes	4 sets	
7	30 flange Group	Compatible with 30mm outer diameter SUS 304 quartz tubes (4 sets)		
	Item			
8	- rail slider, 3500mm length; slide rail/equipped with 8 sliders	SUJ2	4 sets	
9	Vacuum Pumps		2 units	
10	Thermocouples	K type	8 sticks	
11	Touchscreen screen box and mounting bracket: Kunlun Tongtai has two mountable profiles.			
12	temperature controllers (8 units)	Yu Dian		
13	Filters (2 units)			
14	One chiller with a pressure compressor			
15	PLC module independent electrical box, Siemens S7-200 base	Basic version, 24-volt power supply, etc.	2 sets of dimensions based on bracket width	Designed to facilitate suspension Hang and install on the upper and lower right sides Place one set on each side
16	Pressure gauges		2	
17	Angle valve, 18	4 stainless steel		
	Belows, KF25 interface connection, matching clip.	hoop		The length of the two pieces depends on their height from the ground. Principle of Proximity

Main website: www.gwdl.com Email: wqq@gwdl.com Contact: 13271526781 0379-69936789

Address: No. 1, Xingye 1st Road, Science and Technology Industrial Park, Jianxi District, Luoyang City, Henan Province

Main station: www.gwdl.com Email: wqq@gwdl.com Contact information: 13271526781 0379-69936789

Add: No. 1, Xingye 1st Road, Science and Technology Industrial Park, Jianxi District, Luoyang City, Henan Province



高新技术企业/专精特新企业
专业的高温加热制造工厂 (-100~2600°C)

中国热处理行业协会理事单位
ISO45001:职业健康管理体系认证
ISO14001:环境管理体系认证
ISO9001:质量管理体系认证
欧盟CE产品认证



咨询电话
13271526781
+86 379-69936789



11 Panels 1750x700x2 (Length x Width x Thickness) SUS 304 10 Profile Brackets 3500x700x2300	6	
(Length x Width x Thickness)		A6063-T5 1 set, one furnace on each of the upper and lower levels.
(High) 11 Tank chains are used in conjunction with the furnace for sliding.	2 roots	

Thank you for contacting us!

Thank you for contacting us! Company

Name: Luoyang Ju Xing Kiln Co.,

Ltd. Company Address: Advanced Manufacturing

Cluster Area, Jianxi District, Luoyang City

Company Address: Jianxi District, Luoyang advanced manufacturing enclave

Contact information: 13271526781, 0379-69936789

Website addresses: www.gwdl.com, www.gwdlcom.cn, www.gwdl.org, www.gwdl.cn

Main website: www.gwdl.com Email : wqq@gwdl.com Contact information: 13271526781, 0379-69936789 Address : No. 1, Xingye 1st Road, Science and Technology Industrial Park , Jianxi District , Luoyang City, Henan Province